

EMPATH™ Continuous Monitoring System (ECMS)

Enhance your motor reliability program while lowering testing cost

Challenge

Electric motors and mechanical systems are subject to deterioration and damage that can impact operations, leading to expensive repairs and downtime. Electrical Signal Analysis (ESA) methodology is an additional tool to be used in the plant's motor reliability maintenance program. The fully-automated, remotely-operated ECMS platform can improve motor testing efficiency and reduce the cost of current testing methods.

Solution

Framatome's proven product, EMPATH™ helps owners detect potential motor problems early, enabling timely repairs and avoiding serious damage. The EMPATH Continuous Monitoring System (ECMS) is designed to automatically test multiple motors from a remote location.

EMPATH Continuous Monitoring System

ECMS hardware consists of a 32 channel multiplexer, followed by a signal conditioner. The inputs are provided by the E-Plug modules permanently installed in the Motor Control Centers (MCCs). ECMS output is sent to the server over Ethernet connections.

ECMS automatically pulses the motors at user-defined intervals, collects and analyzes the data, and then stores it in various locations including the cloud servers. In cases where the results are out of tolerance, ECMS sends various flags including SMMs, emails and on-screen indications.

The tolerance limits can either be set by the operator or determined automatically using the statistics of the collected data.



Customer benefits

- Can improve motor testing efficiency and reduce the cost of current testing methods
- Automatically test multiple motors from a remote location
- Collected data is fully compatible with EMPATH, which helps owners detect potential problems early enabling timely repairs and avoiding serious damage
- Can be used as a data acquisition unit for EMPATH
- Total of 3,200 motors can be monitored per server

Your performance
is **our** everyday **commitment**

Technical design


- 32 channels (each channel consists of three phases of current and voltage)
- Up to 100 ECMS hardware can be installed per server (total of 3,200 motors can be monitored per server).
- Inputs are provided by E-Plug inputs
 - 600 VAC (phase-to-phase)
 - 1000 Amp
 - o For higher voltage or current inputs, the secondary side of the PTs and CTs are used
- Sample rate: 12,000 samples/sec/channel
- Collected data is fully compatible with EMPATH
- Can be used as a data acquisition unit for EMPATH
- Data I/O is done over Ethernet
- Power supply 110/220 VAC

ECMS lets user choose which combination of parameters to monitor, such as:

- Current and voltage
- Power factor and power
- THDC and THDV
- Load
- Efficiency
- Output torque
- Motor unbalance ratio
- Slip sideband amplitudes
- Rotor bar health category
- Power factor variation
- Line frequency
- Motor RPM
- Rotor bar health index
- VF ratio (for VFDs)

ECMS can also be controlled by TCP/IP protocols, which makes it suitable to SCADA type supervisory systems.

Special single and 2-channel systems for wind, transportation and individual remote applications. Ask for the EmpathCMS Mini kit.

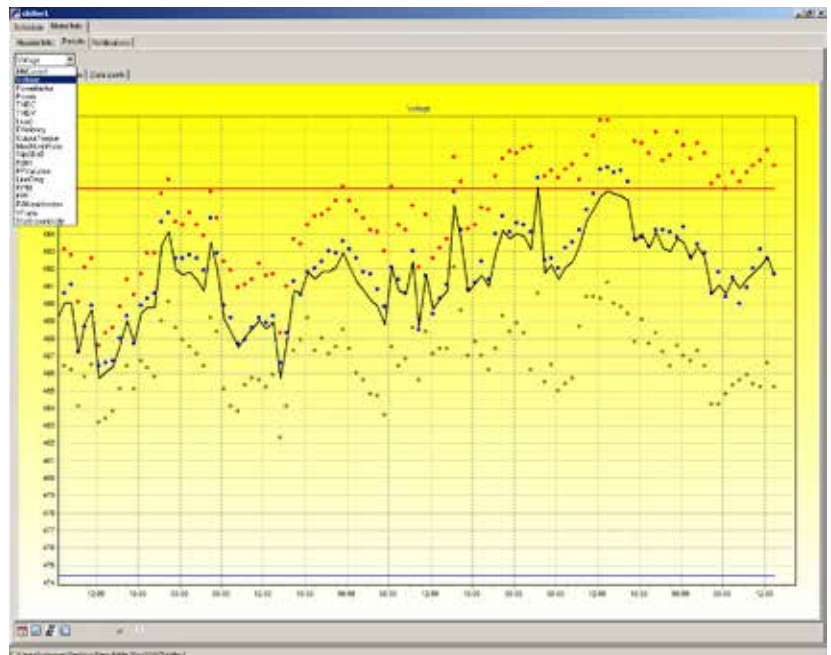

ECMS showing the collected voltage data (with the upper and lower limits)

Contact: info@motordocllc.com or contact Charlie Stevens 800 919-0156 ext 102
www.motordoc.com and www.EmpathCMS.com

EMPATH is a trademark of Framatome Inc. The data and information contained herein are provided solely for illustration and informational purposes and create no legal obligations by Framatome Inc. None of the information or data is intended by Framatome Inc. to be a representation or a warranty of any kind, expressed or implied, and Framatome Inc. assumes no liability for the use of or reliance on any information or data disclosed in this document. ©2018 Framatome Inc. All rights reserved.
PS_US_723_ENG-11-18